

UNDERGROUND PROPANE DOMESTIC TANKS




TANK FEATURES:

- All tanks are equipped with RegO valves and Rochester gauges
- Vacuum purged
- Polymer dome
- Forged lifting lugs
- Designed and constructed in accordance with the ASME ("U" Stamped and the B51) registered with a CRN, and complies with the requirements of the NFPA 58
- Registered with the National Board of Boiler & Pressure Vessels



YOUR TANK OUR EXPERTISE

UNDERGROUND TANKS SPECIFICATIONS:

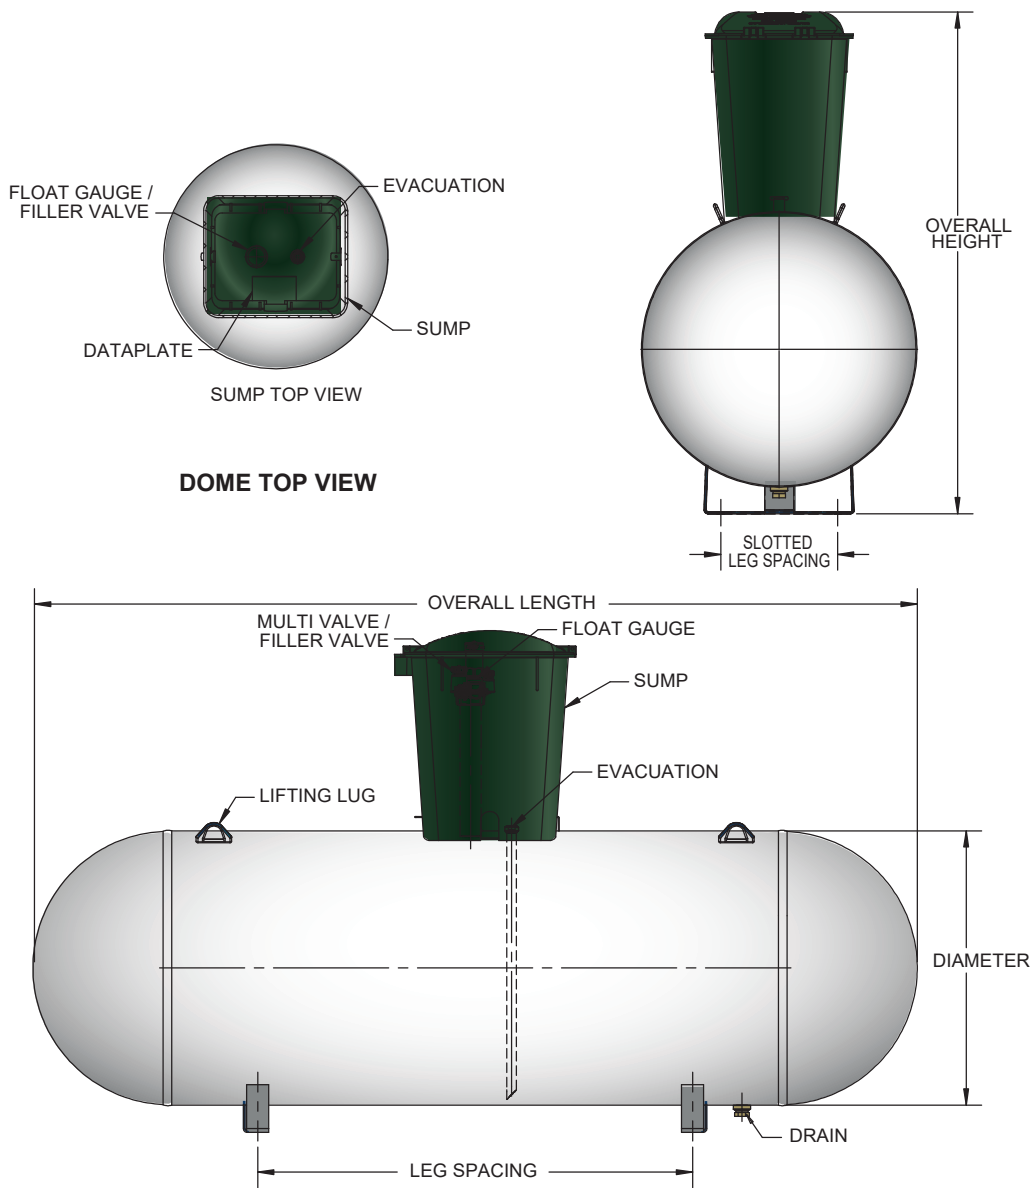

EXTERNAL SURFACE:

All tanks are coated with AkzoNobel polyester based powder coating. This coating offers excellent corrosion protection as well as chemical resistance.

Capacity Gal / L	Exterior Diameter In/mm	Head Type	Overall Length In / mm	Overall Height In / mm	Leg Width In / mm	Leg Spacing In / mm	Weight Lbs / Kg	Quantity	
								Full Load	Per Stack
320 USWG / 1211 L	30" / 762 mm	HEMI	9'-10" / 2997 mm	3'-3" / 991 mm	20-1/2" / 521 mm	4'-0 1/4" / 1226 mm	675 Lbs / 307 Kg	45	9
500 USWG / 1893 L	37-1/2" / 953 mm	HEMI	10'-1" / 3073 mm	4'-0" / 1219 mm	20-1/2" / 521 mm	4'-11 1/2" / 1511 mm	1146 Lbs / 521 Kg	29	6
1000 USWG / 3785 L	41" / 1041 mm	HEMI	16'-2" / 4928 mm	4'-3" / 1295 mm	20-1/2" / 521 mm	10'-2 1/2" / 3112 mm	2061 Lbs / 937 Kg	14	5
2000 USWG / 7570 L	48" / 1219 mm	ELLIP	22'-8" / 6909 mm	4'-10" / 1473 mm	24-1/2" / 622 mm	13'-9 1/2" / 4204 mm	4500 Lbs / 2046 Kg	8	4

CANADA

SHERBROOKE, QUEBEC
T (819) 566.8211 F (819) 821.2513
Sales@proparinc.com

AYLMER, ONTARIO
T (519) 765.3334 F (519) 765.3395
Sales@proparinc.com

UNITED-STATE

BANGOR, MAINE
T 207.737.9704
Sales@proparinc.com



proparinc.com